




**UNICAM  
SYSTEMS**  
LEGITIMATE SECURITY GUARANTEED

*India's Most Trusted CCTV Brand*

**UC-B260 L3-SL**



**DUAL LED**



**COLOR<sup>+</sup>**  
IP CAMERAS




*Built-in Audio*

**6MP NETWORK  
IR BULLET CAMERA**

[www.unicamsystems.com](http://www.unicamsystems.com)

## 6MP Network IR Water-proof

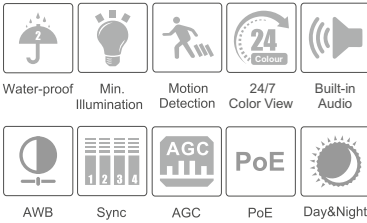

Unicam ColorPlus technology provides 24/7 vivid colorful images with F1.0 advanced lenses, high performance sensors and friendly lighting. F1.0 super-aperture collects more light to produce brighter images. Advanced sensor technology can vastly improve the utilization of available light. In zero-light scenarios, built-in, warm supplemental lighting works to guarantee colorful images.

## Features

- 6MP ( 3072 x 2048 ) coding
- Max. resolution: 3072 x 2048
- ICR auto switch, true day / night
- Dual Mode LED 10 ~ 20m IR night view distance
- 10~20m white light view distance
- 3D DNR, digital WDR, ROI coding
- PoE power supply
- Smart analytics (optional): abnormal video signal detection, intrusion detection and line crossing detection
- Support smart phone, iPad, remote monitoring
- P2P function optional
- IP67 ingress protection
- Support three streams
- Built-in microphone for real-time audio security
- 24/7 colorful imaging

## Specifications

Specifications	Model	UC-B260 L3-SL
<b>Camera</b>		
ImageSensor		1 / 3 "CMOS
ImageSize		3072 x 2048
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Auto Iris		Fixed Iris
Min. Illumination		0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light
Lens		6 mm @ F2.0, horizontal field of view : 72°
LensMount		M12
Day & Night		ICR
Wide Dynamic Range		Hardware WDR
Digital NR		3D DNR
Angle Adjustment		Any angle
Audio		In-Build Audio
<b>Illuminator</b>		
White Light Range		20m
IR Range		20-30m
Smart Supplement Light		Yes
<b>Image</b>		
Video Compression		H.264 / H.265 / H.265+
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		6MP (3072 x 2048), 5MP (2592 x 1944), 4MP (2560 x 1440), 3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720)
Main Stream		60Hz : 3MP ( 1 ~ 30fps ) / 1080P ( 1 ~ 30fps ) / 720P ( 1 ~ 30fps ) 50Hz : 3MP ( 1 ~ 25fps ) / 1080P ( 1 ~ 25fps ) / 720P ( 1 ~ 25fps )
BitRate		128 Kbps ~ 6 Mbps
EncodeMode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
ImageSettings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
<b>Interfaces</b>		
Network		RJ45
<b>Functions</b>		
RemoteMonitoring		IEbrowsing,CMSremote control
OnlineConnection		Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP
Interface Protocol		ONVIF
Storage		Network remote storage
SmartAlarm		Motion alarm
IRDistance		10 - 20 m
Water-proof		IP67
<b>Others</b>		
PowerSupply		DC12V / PoE
Power Consumption		< 5W
Operating Environment		- 20°C ~ 50 °C, 10% ~ 90% humidity
Dimensions ( mm )		167.5 x 70.0 x 70.0
Weight ( net )		380 g
Installation		Wall mounting, ceiling mounting